

AFCO caps and bases are manufactured with the same attention to detail and advanced materials as our column shafts. From Tuscan to Temple of the Winds, their durability and classic styling make AFCO columns the top choice of discriminating builders and designers.

The following are common sizes; see your price guide for the full list of sizes available.

ROUND LOW PROFILE TUSCAN BASE

Bottom Shaft Diameter	Low Profile Tuscan Base		Attic Base	
	Height	Abacus	Height	Abacus
8"	2-1/2"	10"	4-5/8"	10-3/4"
10"	2-1/2"	11-7/16"	5-3/4"	13-1/8"
12"	2-1/2"	13-1/4"	6-3/8"	15-3/4"



Urethane Low Profile Tuscan Base



Attic Base

DORIC CAP & CRAFTSMAN BASE

Bottom Shaft Diameter	Doric Cap		Bottom Shaft Diameter	Craftsman Base	
	Height	Abacus		Height	Abacus
8"	2-3/4"	9-7/8"	8"	7-7/8"	9-1/2"
10"	3-1/8"	12-3/8"			
12"	4-1/4"	14-5/8"			
14"	4-7/8"	17-1/2"			



Doric Cap



Craftsman Base

ROUND CAST DECORATIVE CAPITALS

Bottom Shaft Diameter	Scamozzi			Roman Ionic			Temple of the Winds			Roman Corinthian		
	O/S Dia.	Height	Abacus	O/S Dia.	Height	Abacus	O/S Dia.	Height	Abacus	O/S Dia.	Height	Abacus
8"	6-1/2"	3"	10-1/8"	6-5/8"	3-1/8"	8-1/8" x 10-1/16"	6-5/8"	7-1/4"	10-3/16"	6-1/4"	9"	11-3/4"
10"	8-7/8"	3-3/4"	14-1/8"	7-7/8"	3-7/8"	10-1/2" x 13-1/4"	8-5/8"	10-7/16"	13-5/8"	8-1/2"	12-1/4"	14-1/2"
12"	9-7/16"	4-7/8"	16-3/8"	9-5/8"	4-7/8"	12" x 16-1/16"	10-1/2"	11-7/8"	16-1/2"	10-1/16"	14-1/2"	18-5/8"
14"	12"	5-1/2"	18-5/8"	12-1/16"	5-3/4"	17"	11-5/8"	14-1/16"	21-1/4"	12-1/4"	17-1/4"	22-3/8"



Scamozzi



Roman Ionic



Temple of the Winds



Roman Corinthian

Manufactured By:

AFCO
INDUSTRIES, INC.

3400 Roy Street
Alexandria, LA 71302
800 551-6576
www.afco-ind.com

Other AFCO Manufacturing Facilities:

Olive Branch, MS
Pell City, AL

Distributed By:

AFCO
INDUSTRIES, INC.

*Fiberglass
Columns*



TAPERED

STRA

AFCO Industries has continuously produced residential and commercial columns for the past 40 years. AFCO fiberglass columns will enhance your home or business with not only style and elegance but will also provide you with years of maintenance free service.

AFCO **Pro-Cast** fiberglass columns are centrifugally cast from fiberglass-reinforced polymers, producing a beautiful, tapered column, conforming to the Tuscan order of architecture.

Our columns are durable and virtually maintenance free. AFCO offers two styles of bases, along with five optional capitals. Shaft options include smooth, fluted, split for wrap-around applications and pilasters. Special cuts are available for length or inside/outside corner installations.

AFCO columns are easy to install and come with a **limited lifetime warranty** for the original user.




For larger-diameter applications, AFCO **Pro-Spray** fiberglass columns provide the same Tuscan style and beauty as our smaller cast columns. Compared to other larger diameter cast columns, AFCO Fiberglass Columns are easily modified for wrap around applications, and the light weight material often eliminates the need for a job-site crane.

▼ **AFCO also offers vinyl railing, the perfect complement to your fiberglass columns. Call your dealer or AFCO for pricing and information.**



▲ **AFCO's Pro-Lite square fiberglass columns are manufactured using a pultrusion process that enables the column walls to be extremely light but also very strong and load bearing.**

Classical builders discovered that columns of uniform diameter created an optical illusion, appearing too narrow at the center. To counteract this effect, they devised a practice of tapering the upper part of their columns gradually toward the top.

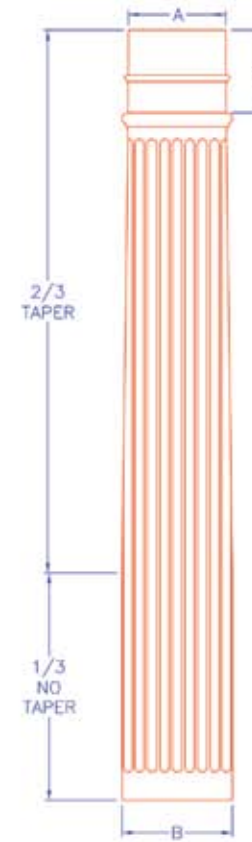


Our column shafts are tapered in accordance with the classical Orders of Architecture, to assure a striking visual effect in any application.

AFCO columns are easily cut and drilled. Installation instructions are included in each box and are easy to follow for either the do-it-yourselfer or contractor.

*Load-bearing capacity is dependent on distributing the load evenly over bearing surfaces of the shaft. All installation information is of general nature; columns should be installed and secured (fastened) according to standard construction practices and in compliance with applicable local, state and federal building regulations. Note: 2nd story balconies should not be attached directly to the side of any column.



▲ **AFCO's fiberglass column manufacturing facility utilizes state of the art molding techniques combined with dedicated employee-owners to produce the best columns available**

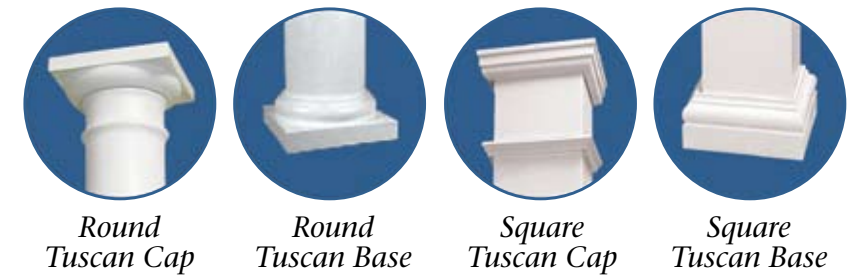

AFCO Fiberglass Column Sizes and Cap & Base Information

PRO-LITE SQUARE FIBERGLASS COLUMNS

Base Dimension	Lengths Available	Shaft Width / Neck Dimension	Base Dimension-(B)	Neck Height-(C)	*Max. Load lbs.	Urethane Tuscan Cap		Urethane Tuscan Base	
						Height	Width	Height	Width
6"	8',9',10'	5-1/2"	—	—	6,500	2-1/2"	8-1/4"	3-1/2"	9"
8"	8',9',10"	7-1/2"	—	—	6,500	2-1/2"	10-1/8"	4-5/8"	10-1/8"
10"	8',9',10',12'	9-1/2"	—	—	6,500	3-3/8"	12-1/2"	5"	12-3/4"
12"	8',9',10',12'	11-1/2"	—	—	6,500	3-1/2"	15-1/2"	5-3/4"	15"

PRO-CAST SMALL DIAMETER COLUMNS

Base Dimension	Lengths Available	Shaft Width / Neck Dimension	Base Dimension-(B)	Neck Height-(C)	*Max. Load lbs.	Height	Abacus	Height	Abacus
						2-1/2"	6-5/8"	3-1/2"	7-3/8"
6"	8'	4"	5-11/16"	5"	8,000	2-1/2"	6-5/8"	3-1/2"	7-3/8"
8"	5',6',8',9',10'	6-1/4"	7-5/8"	5-1/4"	10,000	2-1/2"	9-7/16"	4"	9-7/8"
10"	5',8',9',10',12'	7-1/2"	9-5/8"	6-1/2"	14,000	3-1/8"	11-7/8"	5-1/16"	13"
12"	8',9',10',12'	9-1/4"	11-5/8"	8"	18,000	3-1/4"	13-7/8"	5-15/16"	15-5/8"
14"	8', 10', 12'	11-1/2"	13-5/8"	8-1/4"	20,000	4-1/16"	17-1/4"	7-1/16"	18-1/2"
16"	10', 12'	13-7/8"	15-1/2"	8-3/4"	20,000	2-3/4"	19-15/16"	8-1/16"	21"

PRO-SPRAY LARGE DIAMETER COLUMNS

Base Dimension	Lengths Available	Shaft Width / Neck Dimension	Base Dimension-(B)	Neck Height-(C)	*Max. Load lbs.	Height	Abacus	Height	Abacus
						4-1/16"	17-1/4"	7-1/16"	18-1/2"
14"	14',16'	11-1/2"	13-5/8"	8-1/4"	20,000	4-1/16"	17-1/4"	7-1/16"	18-1/2"
16"	14',16',18',20'	13-7/8"	15-1/2"	8-3/4"	20,000	2-3/4"	19-15/16"	8-1/16"	21"
18"	10',12',14',16',18',20'	15-3/4"	17-1/2"	10-3/4"	20,000	3"	21"	9-1/2"	25-5/8"
20"	18',20',22',24'	17"	19-1/2"	9-3/4"	20,000	5-3/4"	19-1/4"	10-3/4"	27"
22"	18',20',22'	18-1/2"	21-1/2"	10"	20,000	6"	24-1/4"	12-1/8"	29-3/4"
24"	12',16',20',22',24',26'	20"	23-1/2"	11-1/2"	20,000	4-1/8"	26-1/2"	5-1/4"	32-1/2"
30"	20',22',24'	25"	29-1/2"	14"	20,000	5-1/8"	35-3/4"	7-1/4"	40-1/2"
36"	20',22',24'	30"	35-1/2"	15-3/4"	20,000	6-1/4"	42-3/4"	8-3/4"	48-3/4"